


TP-LINK - EAP653 WiFi Access Point- protok 6

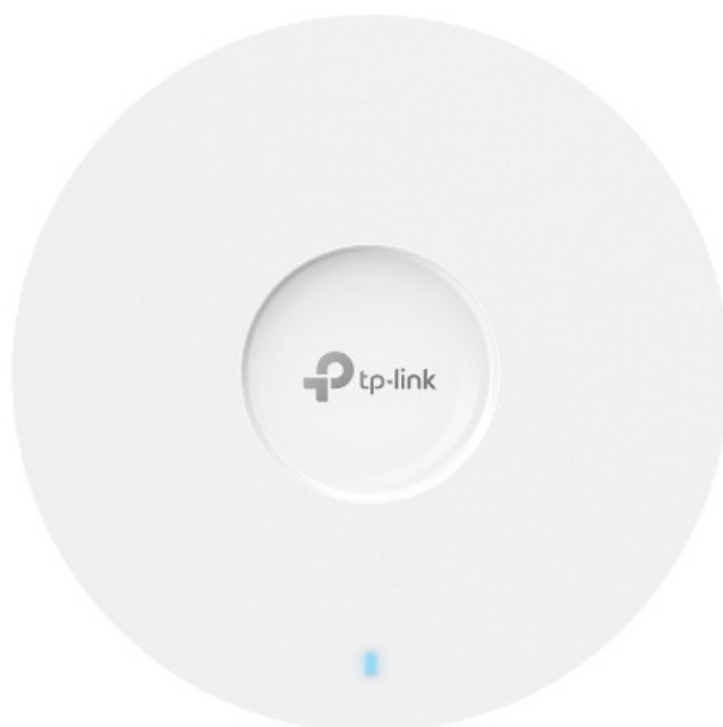

Web cena - 16330.00

web šifra LAN-04172

Karakteristike - EAP653 WiFi Access Point- protok 6

Brend	
Brend	TP-LINK
Priključci / Slotovi	
RJ-45	1x 10/100/1000 BaseT for LAN
Ostali priključci / Slotovi	1 × Reset hole, Pasivni PoE, 1 x 10/100/1000Mbps Shielded Ethernet Port (Passive PoE in)
Fizičke karakteristike	
Dimenzije	160mm x 160mm x 33.6mm
Pakovanje	Set za montažu na zid, Set za montažu na plafon, Set za montažu na razvodnu kutiju
Materijal	ABS plastika
Boja	Bela
Antene	
Tip	Unutrašnje, Omni-direkciona
Broj	4
Snaga emitovanja	<20 dBm (2.4 GHz), <23 dBm (5 GHz, Band1 i Band2)
Jačina	5dBi na 5GHz, 4dBi na 2.4GHz
Ostalo	Antene nisu odvojive, MIMO antene, Dual-Band, MU-MIMO
Bežična mreža	
Standardi	IEEE 802.11a/b/g/n/ac/ax
Bežični protok	574Mbps + 2402Mbps
Frekventni opseg	2.4GHz - 5GHz
Žična mreža	
Standardi žične mreže	IEEE 802.3, IEEE 802.3at (PoE+)
Žični protok	10/100/1000Mbps (1xLAN ili 1xWAN)
Protokoli žične mreže	TCP/IP, HTTP/HTTPS, IPv4/IPv6, NTP, VLAN, SNMP, SSH
Ostalo	
Podržane tehnologije	Guest Network, Access Control, MU-MIMO, Beamforming, Airtime Fairness, Omada Mesh, Band Steering, UPnP™, Traffic Analyzer, Parental Control, Roaming Assist, Hide SSID, OFDMA, TWT
Upravljanje	Omada App, Web konfigurisanje, SNMP v3, Web (HTTPS), Web-bazirani interfejs (HTTP/HTTPS), SNMP v2, Reboot, SNMP v2C
Dodatne funkcije	Multiple SSIDs, QoS Management, SSID Broadcast, Seamless Roaming, Wireless radio, PoE, Access Point, WMM, 1024-QAM, Wireless Statistics based on SSID/AP/Client, Beamforming, VLAN označavanje za SSID
Ostalo	PoE Support (802.3af/at), Sertifikati CE
Zaštita	
WPA	PSK, Enterprise, TKIP, Personal
WPA2	PSK, Enterprise, TKIP, Personal
Autentifikacije	802.1x, RADIUS, TLS

Brend	
Priključci / Slotovi	
Fizičke karakteristike	
Antene	
Bežična mreža	
Žična mreža	
Ostalo	
Zaštita	
Firewall	
Osnovne karakteristike	
Reklamacioni period	
Ostalo	Rogue AP Detection, Wireless access control, SSID to VLAN Mapping, Wireless Mac Address Filtering, Wireless Isolation Between Clients, Captive Portal Authentication, WPA3-SAE, HTTPS, Syslog, WPA3-Personal, WPA3-PSK, WPA/WPA2-Enterprise, WPA3-Enterprise, SSH, MAC address filtering
AES	CCMP
Firewall	
Ostalo	Access Control, IP/MAC Filtering
Osnovne karakteristike	
Tip	Access Point
Reklamacioni period	
Reklamacioni period	24 meseca